



Bars / Ice Cream / Table Service / Quick Service



Dusty Environments Like Pizza and Bakeries



Cafeterias / Discount Stores



Convenience Stores / Small Grocery Stores



Tobacco Stores / Liquor Stores

Fanless POS Terminal with True Flat Touch Screen



Vivid LED Backlight for Reliability and Energy Savings

Powered by an Intel Celeron **dual-core fanless** processor and designed with a true flat touch panel, the TITAN-150 provides superior spill and dust resistance that ensures optimum performance in harsh retail and food service environments.

- Intel Celeron 1037U Dual Core 1.8GHz Fanless Processor – Enclosed Case and Fanless Processor Minimize Incursion of Dust and Environmental Debris
- True-Flat – Debris Will Not Collect and Disrupt Touch Operation – Resists Liquid Splashes and Allows Easy Clean Up
- Connection Panel is Conveniently Located at the Top of the Terminal – Allows Cables to Be Hidden and Routed Neatly Through the Stand and Out the Bottom of the Terminal
- Integrated Power Supply



TITAN-150 Touch Screen Terminal



Sleek Cabinet Design



Optional Integrated 9.7" Rear LCD Customer Display



Optional Integrated Rear VFD Customer Display



Integrated Power Supply and Cable Management Keeps Cords Hidden and Organized

Options and Upgrades

Configure your system with these easy to add options:

- Integrated VFD Customer Display – 2 Lines x 20 Characters
- Integrated 15", 9.7" or 7" LCD Customer Displays
- Integrated Fingerprint Reader
- Solid State Drive
- SATA Compact Flash Adaptor
- WiFi Module
- Wall Mount Bracket with Standard VESA Configuration

Applications

The attractive, powerful TITAN-150 fanless terminal is ideal for harsh environments like pizza, quick service restaurants, bakeries and industrial shop floors and for processor intensive applications including table service, retail scanning and many more:


- Airline Counters
- Automotive Services
- Convenience Stores
- Digital Signage
- Dry Cleaners
- Financial/Banking
- Food & Drug Stores
- Gaming
- Hospitality
- Hotel Front Desk
- Interactive Workstations
- Kiosks
- Kitchen Video
- Medical
- Message Stations
- Point of Sale
- Quick Service
- Rental Car
- Rental Stores
- Retail Scanning
- Self Service
- Streaming Video
- Table Service
- Training
- Unattended Workstations

Connectivity

- A** DC In (Power)
- B** DC Out (For Rear LCD)
- C** COM4 (Powered)
- D** VGA
- E** COM3 (Powered)
- F** USB (2)
- G** COM2 (Powered)
- H** COM1 (Powered)
- I** LAN
- J** USB (2)
- K** Line-In
- L** Line-Out
- M** Mic-In
- N** Cash Drawer Selector Switch
- O** Drawer Voltage
- P** Parallel
- Q** Hard Disk Drive

Specifications

Processor:	Intel Celeron 1037U 1.8GHz Fanless	
Cores / Threads	Dual Core / 2 Threads	
Cache Memory:	2MB	
Bus Speed:	5 GT/s (Giga Transfers per Second)	
Display LCD:	True Flat 15" LCD with LED Backlighting	
Resolution:	1024 x 768	
Brightness:	Adjustable Up to 350 cd/m2	
Integrated Speakers:	Integrated 2 Watt Speakers	
Chipset (PCH):	NM70	
Touch Panel:	5-Wire Resistive Touch	
MCR:	Integrated USB Interface Triple Track MCR	
Hard Drive:	2.5" With SATA Interface	
RAM Memory (2 Slots):	2GB SODIMM DDR3 (1600MHz) Expandable To 4GB	
Video Memory:	Shared System Memory Up To 512MB	
Compact Flash:	Optional SATA Adaptor	
Serial Ports:	COM1, COM2, COM4 = DB9M With Pin 9 Voltage (0V/+5V/+12V) Selectable By BIOS / COM3 = RJ45 Pin 1 Voltage (0V/+5V/+12V) Selectable By Jumper COM3 = RJ45 for Customer VFD	
Parallel Port:	One DB25F	
USB Ports:	6 V2.0 (2 Left Side / 4 Top)	
Cash Drawer Port:	RJ11, 12V or 24V Selectable By Switch (Maximum 2 Drawers – Supports Open/Close)	
Keyboard / Mouse Port:	Not Applicable (Use USB Port)	
LAN Port:	RJ45 10/100/1000 Base-T (Giga LAN) RealTek RTL8111E	
VGA Port:	One DB15F Display Port For Second LCD (Maximum Resolution 2048 x 1536)	
Audio Port:	One Line-In / One Line-Out	
Mic Port:	One Mic-In	
Power Supply:	60W, 12V/5A External Power Adaptor 100-240V 50-60Hz	
Current / Power Usage:	0.25A / 27W (110V Idle Environment)	
Operating Temperature:	32° F to 104° F (0° C to 40° C)	
Compatible O/S:	POSReady 2009 / POSReady 7 / Windows Pro Embedded 7 / Windows Pro 8 / Windows Embedded 8 Industry Pro	
Dimen. / Weight – Base:	8-3/4 "W x 2-3/8"H x 9-9/16"D	
Overall:	12-1/2"W x 15"H x 9-9/16"D	18.56 lbs.
Shipping Carton:	17"W x 12-1/2"H x 19"D	20.02 lbs.
Safety and EMI:	FCC, RoHS	

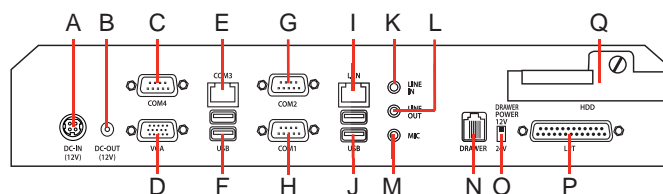

All product and company names are trademarks, service marks or registered trademarks of their respective owners. All features and specifications are subject to change without notice.

© 2014, Printed in U.S.A.

Lit-252

SAM4S